

TELEINDUSTRIA srl

Phone:(39) 2 4571 3729

Fax:(39) 2 4571 4000

E-mail: sales@teleindustria.it

Web-site: **www.teleindustria.com**

Explosion-proof Flashing Beacon with integrated telephone interface mod. FEF100AXCA (LXF-1)

PHONEALERT-Ex®



Body:aluminium light-alloy
Painting:Orange RAL2003
Wall brackets:..... stainless steel
Lens:tempered glass
Termination:..... screw terminals
Weight: 1,4 kg
IP-rating:66
Power voltage:230Vac
Range of electronic cards: -40°C ÷ +70°C
Dimensions:Ø150 x 245mm
Cable inlets: nr. 2 threaded holes 3/4" NGK
Cable glands: not included

ORDER CODES

FEF100TXCA/10J/230..... 5 Joules – 230vac
FEF100TXCA/15J/230..... 15 Joules – 230vac
FEF100TXCA/21J/230..... 21 Joules – 230vac

FEF100AXCA/10J/230..... 5 Joules – 230vac
FEF100AXCA/15J/230..... 15 Joules – 230vac
FEF100AXCA/21J/230..... 21 Joules – 230vac

The **PHONEALERT®** is an explosion-proof combined **OPTICAL & ACOUSTIC** alarm and signal device. It can be used both for **General Alarms** or for **Repetition of Telephone Calls** in noisy areas.

FEF100AXCA

Activation by 230Vac power supply

Power supply:230 Vac

Flash:10 – 15 - 21 Joule

Xenon lamp: > 2500 hours

Consumption:.....max 55W

FEF100TXCA

Activation by telephone line call-voltage:

Telephone Call Voltage: 30÷100 Vac 25-50 Hz


Power supply:230 Vac

Flash:10 – 15 - 21 Joule

Telephone interface:..... built-in circuit

Lens colours available:

RED - BLUE – YELLOW – ORANGE – GREEN – WHITE
(to be specified in purchase order)

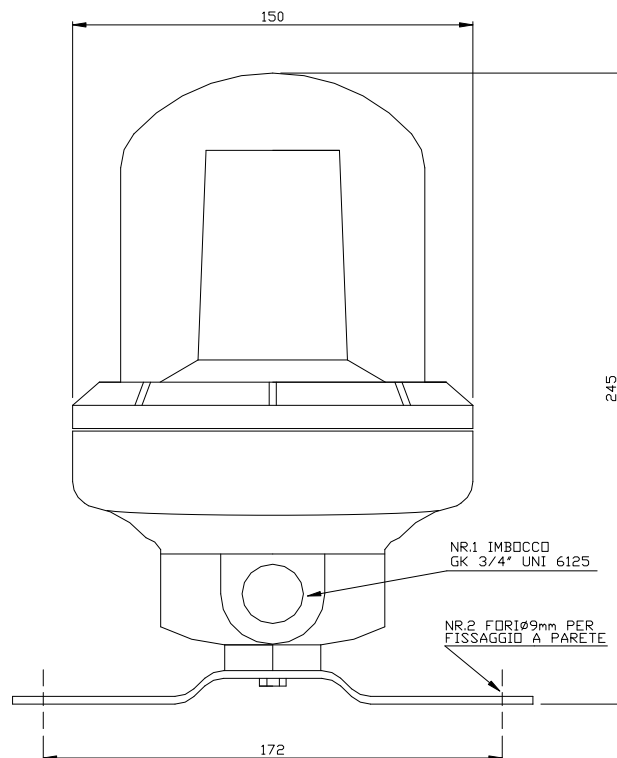

PROTECTION DEGREE & TEMPERATURE RANGE

II2GD Ex db IIC T6 – IP66 / -20°C +60°C
II2GD Ex db IIIC T85°C Db / -20°C +60°C
Ex certificate: ICEPI 13ATEX03C004